


Technical Characteristics

Electrical Characteristics	
Voltage Supply	230V $\pm 10\%$ 50/60Hz
Consumption	1VA
Output	1 Changeover contact 16A - 250V AC 1 3A - 250V cos ϕ = 0.6 1000W Incandescent lighting
Functional Characteristics	
Number of programs	5 Adjustable Pre-recorded Programs
Accuracy	± 6 min per year
Supply Failure Reserve	Total of 3 years
Environment	
Working Temperature	-10°C to +50°C
Storage Temperature	-10°C to +60°C
Cable Capacity	
1 to 4mm ²	
Main Characteristics	
Easy to program: 5 programs are pre-recorded. The user just has to select the program which corresponds to its use and modify time switches if necessary.	

The 5 pre-registered programs are as follows

P	Prog
P0	OFF
P1	ON
P2	6.00 23.00
P3	6.00 8.00 17.00 23.00
P4	6.00 8.00 11.00 13.00 17.00 23.00

Product Presentation

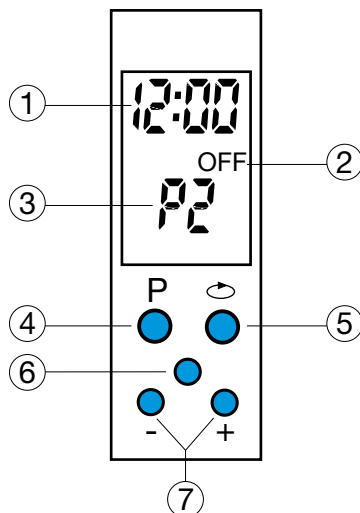

Display

1. Time
2. Circuit Status
3. Program Selection

Buttons

4. P to select the program to apply
5. Reset
6. to scroll program steps
7. + and - : to input time

Electrical Connection

