


Technical data		
Description:	Power distribution block PDB 160	
Construction:	all-side fingersafe, modular system, bridgeable	
Item no. :	082040-0-3	15.11.2016

IEC Specific

Standards:	IEC 60947-7-1		 
Nominal Voltage:	1000 V AC 1000 V DC		
Nominal current:	101 A Cu  164 A Cu 		
Terminal cross section:	Incoming	Cu	
	1 x	2,5 – 25 mm ² 1,5 – 16 mm ² M6 2,5 Nm 19 mm	round conductor Cu (solid wire and multi wire) stranded wire with ferrule allen screw (hexagonal socket) tightening torque stripping length
	Brücke/ Outgoing		
	1 x kombi- niert	1,5 – 16 mm ² 1,5 – 10 mm ² M6 2,5 Nm 19 mm Fork M6	round conductor Cu (solid wire and multi wire) stranded wire with ferrule cross-head screw +/- PZ2 tightening torque stripping length Phase rail Cu
	Outgoing		
	2 x	1,5 – 16 mm ² 1,5 – 10 mm ² M6 2,5 Nm 14 mm	round conductor Cu (solid wire and multi wire) stranded wire with ferrule allen screw (hexagonal socket) tightening torque stripping length
	3 x	1,5 – 10 mm ² 1,5 – 6 mm ² M5 2 Nm 12 mm	round conductor Cu (solid wire and multi wire) stranded wire with ferrule allen screw (hexagonal socket) tightening torque stripping length

Remarks:	The product is compliant with the EC ROHS directives		
Materials:	Terminal body:	brass (CuZn39Pb2)	tin plated
	Basic housing:	PA 6 (Halogen-free)	
	Cover:	PC	
	Screws:	steel	Zn thick-film passivated
Flame resistance:	Self-extinguishing		
Mechanical data:	Dimensions:	width x height x depth (mm):	33 x 49 x 68

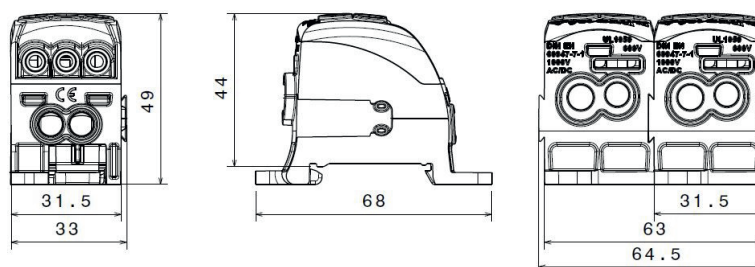

Technical data		
Description:	Power distribution block PDB 160	
Construction:	all-side fingersafe, modular system, bridgeable	
Item no. :	082040-0-3	
		15.11.2016

UL Specific

Standards:		UL-1059	UL-1059							
Nominal Voltage:		600 V AC	600 V AC							
Nominal current:		85 A Cu 	65 A Al 							
Terminal cross section:	Incoming	Cu	Al							
	1 x	14 – 4 AWG 16 – 6 AWG M6 2,5 Nm 19 mm	6 – 4 AWG - M6 5,1 Nm 19 mm	round conductor Cu (solid wire and multi wire) stranded wire with ferrule allen screw (hexagonal socket) tightening torque stripping length						
	Brücke/ Outgoing									
	1 x kombi- niert	16 – 6 AWG 16 – 8 AWG M6 2,5 Nm 19 mm Fork M6	6 AWG - M6 5,1 Nm 19 mm Fork M6	round conductor Cu (solid wire and multi wire) stranded wire with ferrule cross-head screw +/- PZ2 tightening torque stripping length Phase rail Cu						
	Outgoing									
	2 x	16 – 6 AWG 16 – 8 AWG M6 2,5 Nm 14 mm	6 AWG - M6 5,1 Nm 14 mm	round conductor Cu (solid wire and multi wire) stranded wire with ferrule allen screw (hexagonal socket) tightening torque stripping length						
	3 x	16 – 8 AWG 16 – 10 AWG M5 2 Nm 12 mm	- - - - -	round conductor Cu (solid wire and multi wire) stranded wire with ferrule allen screw (hexagonal socket) tightening torque stripping length						
SCCR Rating:	Line	Load	Fuse Class					Amps, kA	Voltage, V	
	4 - 14	8 - 14 Top 4 - 14 Bottom 6 - 14 LS Load	J	T	RK1	RK5	G	CC	200	600
			60	60	60	30	-	30		
			-	-	-	-	60	-		

Design				
Basic housing colour – light grey RAL 7035				
Part no.	Design	Cover colour	PU	GTIN (EAN)
082040-0-3	Universal	crystal clear	1	4051589204033