


## PCE data sheet

|                        |                                                                                                                                                                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>015-6</b>                                                                                                                                                                                                                                                                                          |
| article description    | <b>CEE-plug 16A 5p 6h IP44/IP54 SHARK</b>                                                                                                                                                                                                                                                             |
| description long       | CEE-plug 16A 5p 6h IP44/IP54 SHARK<br>housing material: PA6<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~<br>/ 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>IP protection class: IP44/IP54 |
| GTIN (EAN)             | 9003399100833                                                                                                                                                                                                                                                                                         |
| country of origin      | AT                                                                                                                                                                                                                                                                                                    |
| customs number         | 85366990                                                                                                                                                                                                                                                                                              |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                    |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                    |

|                            |                      |
|----------------------------|----------------------|
| ETIM 7.0                   | EC000140             |
| IEC-ampereage              | 16 A                 |
| Number of poles            | 5                    |
| Voltage acc. EN 60309-2    | 400 V (50+60 Hz) red |
| Clock hour position        | 6 h                  |
| Identification colour      | Red                  |
| Degree of protection (IP)  | IP44                 |
| Connection system          | Screwed terminal     |
| Cable entry                | Swivel               |
| Angle of plug              | Straight             |
| Material                   | Plastic              |
| Contact material           | CuZn                 |
| Surface treatment contacts | Untreated            |

|                    |                       |
|--------------------|-----------------------|
| a                  | 134 mm                |
| b                  | 98 mm                 |
| c                  | 61 mm                 |
| K (cable Ø)        | 8-16 mm               |
| SW                 | 42 mm                 |
| wire flexible      | 1-2,5 mm <sup>2</sup> |
| contact screws     | 100 Ncm               |
| strain relief      | 500 Ncm               |
| dismantling length | 50 mm                 |
| stripping length   | 10-12 mm              |

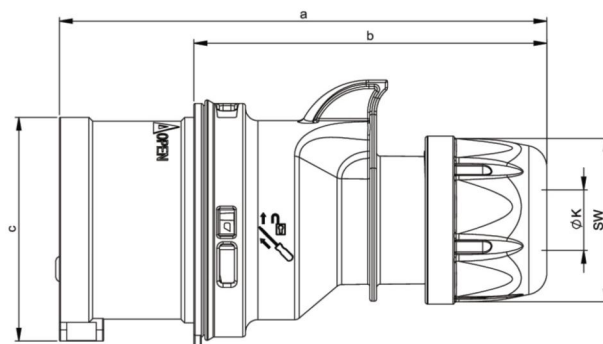

<https://www.pcelectric.at/shop/en/?func=detail&artnr=015-6>



[www.manufacturer-safety.info](http://www.manufacturer-safety.info)