


Plexo™

Weatherproof boxes

Cat. No(s): 0 920 09/21/41

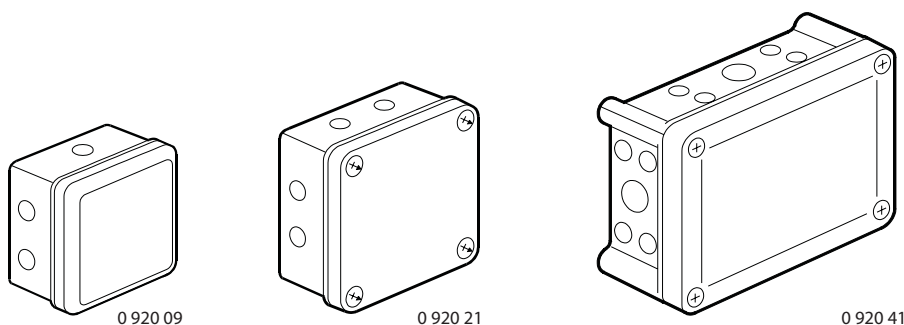

1. USE


Special waterproof boxes for activated fire safety devices for ERP and ERT with pre-knocked entries for cable gland or cabstop.
Complies with ERP regulations according to art. EL16 §1
Complies with standard NFS 61-932 dealing with fire safety systems including activated fire safety devices (compartmentalization, smoke extraction, etc.).
Cover gray color RAL 7037.
Red color box RAL 3000.
Equipped with IP 2 X terminal block for the 155 x 110 box.

2. RANGE

Cat. No.	Internal dimensions	Number Knock-out entries	Cover Type
0 920 09	80 x 80 x 45	7	Clip-on
0 920 21	105 x 105 x 55	7	1/4 turn closure
0 920 41	155 x 110 x 74	16 + 4	1/4 turn closure


3. OVERALL DIMENSIONS (mm)

Cat. No: 0 920 09

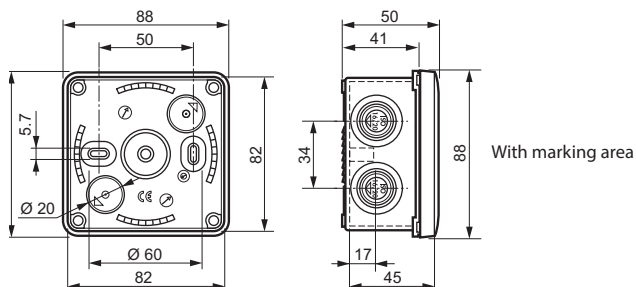


3. OVERALL DIMENSIONS (mm) (continued)

Cat. No: 0 920 21

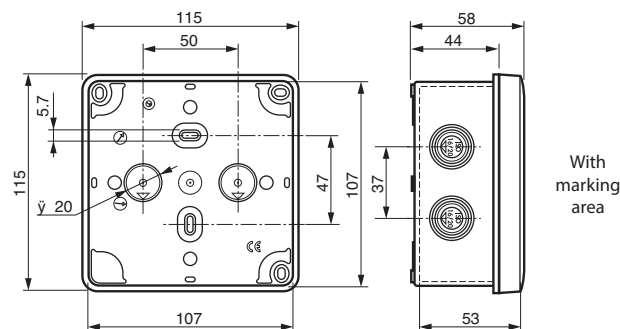

Cat. No: 0 920 41

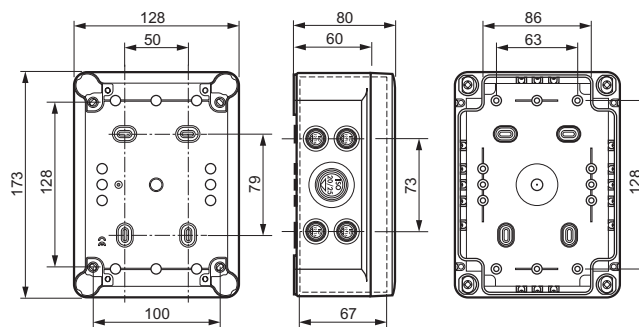

4. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Protection against solid bodies and liquids: IP55
Protection against impacts: IK 07

■ 5.2 Material characteristics

Boxe : ABS
Cover : polypropylène for boxes 0 920 09/21
polycarbonate for boxes 0 920 41
Box cover fixing screw 0 920 21/41: polyamide
UV-resistant
Halogen-free
Self-extinguishing: 960° C/30 s.

4. TECHNICAL CHARACTERISTICS *(continued)*

■ **4.3 Climate characteristics**

Storage and use temperature: -25°C to +40°C

5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products, Pre-saturated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

6. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e.catalogue.