


GRILLES DE SOUFFLAGE

DIFFUSEURS DOUBLE ET TRIPLE FENTES - CARACTÉRISTIQUES AÉRAULIQUES

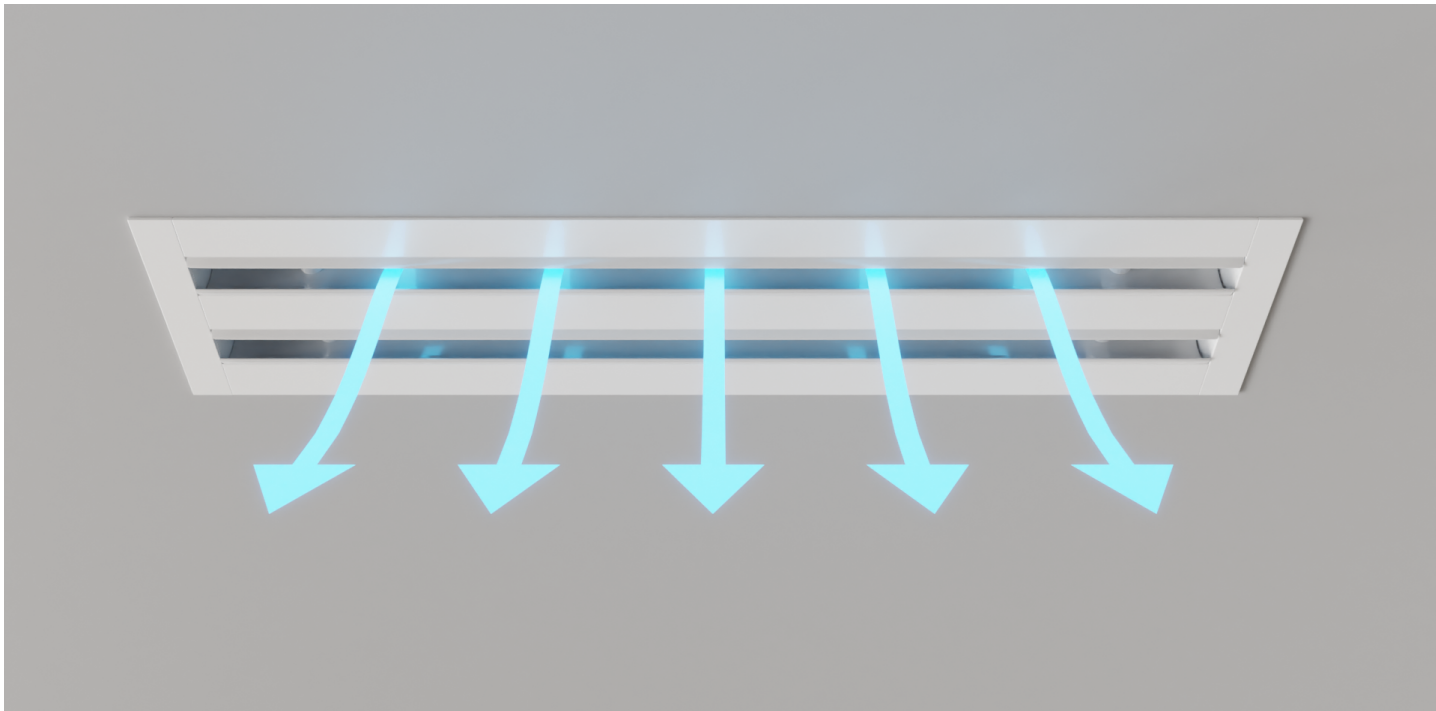

Référence	AK (dm²)	QV (m³/h)											
		200				300				400			
DL2F 500	2,4	4,0	2,3	25,0	12,0	6,0	3,5	38,0	22,0	8,0	4,6	46,0	42,0
DL2F 1000	4,8	4,0	1,2	31,0	15,0	6,0	1,7	44,0	25,0	8,0	2,3	52,0	45,0
DL3F 500	3,6	3,1	1,5	21,0	3,0	5,0	2,3	33,0	9,0	6,5	3,1	41,0	18,0
DL3F 1000	7,2	3,1	0,8	26,0	5,0	5,0	1,2	38,0	11,0	6,5	1,5	46,0	20,0
		8,3	3,9	46,0	29,0	8,3	1,9	51,0	31,0				

QV : débit d'air (m³/h)	Portée (m)	Vitesse (m/s)	Niveau sonore (dBA)	Pression (Pascals)
---------------------------	--------------	-----------------	-----------------------	----------------------

