


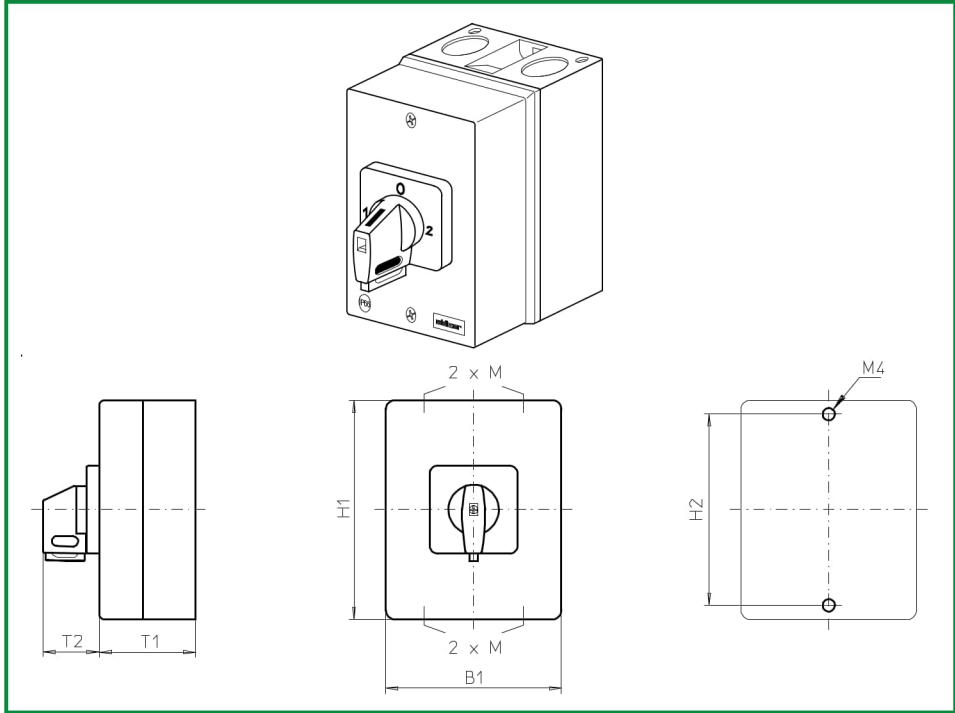

Product line
H200-E

Enclosed switch

Insulated enclosure
250 × 160 × 95 mm
without cover interlock
with N/PE connection link

Cable entries
4 × M25/M32

476V1 (IP66)
478V1 (IP66)

Complete switch	Poles	Product lines	Rated data (IEC 60947)			Order code number
			Operational current I _e	Operational power at 380–440V		
				AC-21A A	AC-23A kW	
Changeover with OFF Switching angle 90° OFF position padlockable 12h	3 ... 4	H200-E	20	5,5	3,7	H216 - 71 ... - 476V1
			25	7,5	5,5	H220 - 71 ... - 476V1
			32	11	7,5	H226 - 71 ... - 476V1
			40	15	11	H233 - 71 ... - 476V1
Changeover with OFF Switching angle 90° 3 positions padlockable (09h/12h/03h)	3 ... 4	H200-E	20	5,5	3,7	H216 - 71 ... - 478V1
			25	7,5	5,5	H220 - 71 ... - 478V1
			32	11	7,5	H226 - 71 ... - 478V1
			40	15	11	H233 - 71 ... - 478V1
SMD modules for basic switch A02						
Mounting form module (switch module EA)			H200-E		BFI2 - EA	
Enclosure module, mounting form 476V1			H200-E		PAH2 - 476V1	
Enclosure module, mounting form 478V1			H200-E		PAH2 - 478V1	
Legend plate silver, enclosure module 476V1/478V1			H200-E		FAS4 - 9... (FA number)	
Dimensions (mm)						
Product line	H1	B1	T1	T2	2xM	H2
H200-E	250	160	95	39	25/32	240