

ROBUS®

OUTDOOR

RAELUX LED BOLLARD

15W, IP66



PRODUCT INFORMATION DOCUMENT

FEATURES

- Suitable for use in domestic and commercial outdoor applications as pathway and garden lighting
- Available in 600mm and 1000mm heights
- Highly efficient LED replacement for traditional halogen fittings
- Equipped with high quality Osram LEDs ensuring luminaire's reliability and high output
- High quality powder coating process for high corrosion resistance
- Prewired with 1m rubber flex
- Suitable for switching by PIR, Microwave or Photocell sensors

CONSTRUCTION

- Die cast aluminium housing and polycarbonate diffuser
- FR-4 driver and LED PCB
- Stainless steel screws



WARRANTY



LIFETIME



LUMENS
PER W



IK RATING



IP RATING



OPERATING
VOLTAGE



BEAM ANGLE



DIMMING



CCT



SAFETY
CLASS

Product Code:

600mm

800mm

RCX153060-25

RCX153080-25

Comparable to:

120W linear halogen

Total Power (W):

15.2

Power Factor:

0.95

Total Light Output (lm):

1080

Total Emergency Light Output (lm):

NA

Efficacy (lm/cctW):

71

Lux at 1m (lux):

700

Emergency Lux at 1m (lux):

NA

CCT (K):

3000

CRI:

80

IP:

66

Operation Temperature (°C):

-20 ≤ Ta ≤ +45

Inrush Current:

12A/7.6us

RG Value:

0

SDCM:

6

Pst LM:

NA

SVM:

NA

Energy Class:

C

Rated Life to L70B50 (Hrs):

50000

Dimensions ØxH (mm):

118x600/1000

Weight (kg):

3.1/4.1

Separate Control Gear Information

Type of Light Source:

LED

Full Load Efficiency (%):

87

P_{NET} (W):

NA

Dimensions (mm):

58x40x24

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

CUBELUX LED BOLLARD
15W, IP66

Cone Illuminance Diagram


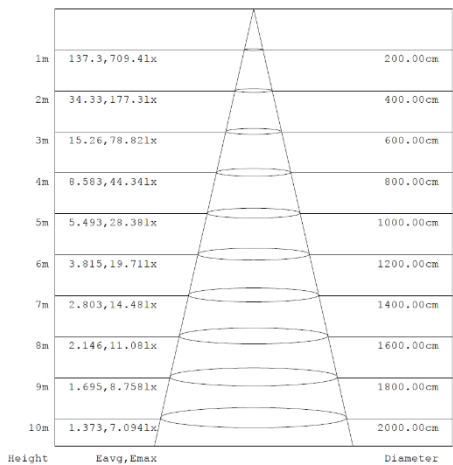


Diagram for RRX153060-25 in 3000K. Other diagrams available on request


Dimension Diagram

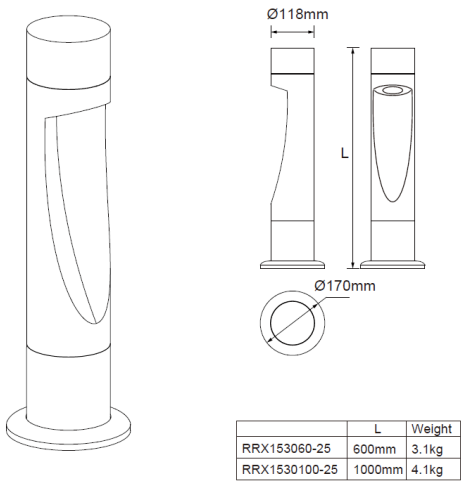

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA

Polar Intensity Diagram

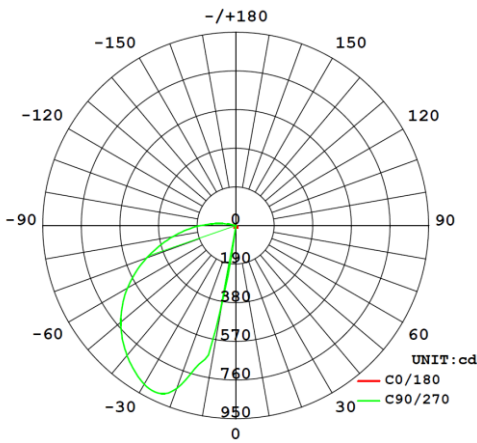

Accessories

NA