


Enclosed Switches

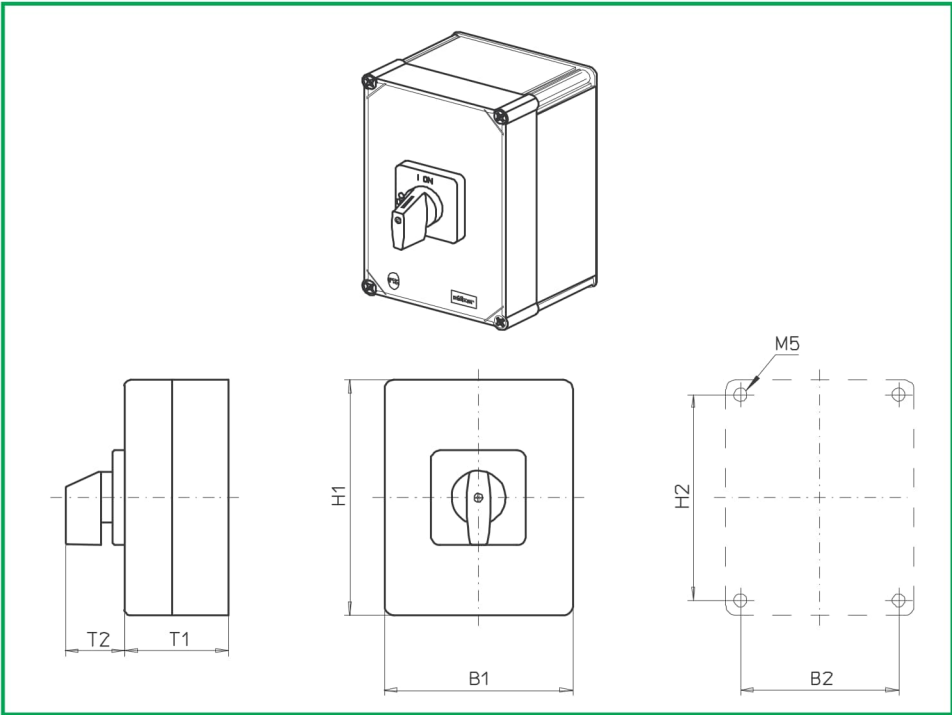

Product lines
H400-D/ E

Enclosed switches

Insulated enclosure
320 x 220 x 180 mm

With cover interlock
in ON position

Cable entries
Gland plates

976M1 (IP66)
978M1 (IP66)

Complete switch	Poles	Product line	Rated data (IEC 60947)			Order code number
			Operational current I _e	Operational power at 380–440 V		
			AC-21A A	AC-23A kW	AC-3 kW	
ON-OFF Switches Switching angle 90°	6 ... 8	H400-D	63	22	18,5	H406 - 41 ... - 978M1
			80	30	22	H408 - 41 ... - 978M1
			100	37	30	H410 - 41 ... - 978M1
			125	45	37	H412 - 41 ... - 978M1
Changeover with OFF Switching angle 90°	3 ... 4	H400-E	63	22	18,5	H406 - 71 ... - 976M1
			80	30	22	H408 - 71 ... - 976M1
			100	37	30	H410 - 71 ... - 976M1
			125	45	37	H412 - 71 ... - 976M1
SMD modules for basic switch A02						
Mounting form module (switch module ED)			H400-D		BFB4 - ED	
Mounting form module (switch module ED)			H400-E		BFC4 - ED	
Enclosure module, mounting form 978M1			H400-D		PAH4 - 978M1	
Enclosure module, mounting form 976M1			H400-E		PAH4 - 976M1	
Legend plate silver, enclosure module 976M1/ 978M1						FAS6 - 9 ... (FA number)
Dimensions (mm)						
Product lines	H1	B1	T1	T2	H2	B2
H400-D	320	220	180	52	293	193
H400-E	320	220	180	52	293	193